

Job Name:

System Reference:

Date:

Indoor Unit:  
MSZ-GL15NA

Outdoor Unit:  
 MUZ-GL15NA-U1  
 MUZ-GL15NA-U2

Wireless Remote Controller



### GENERAL FEATURES

- Slim wall-mounted indoor units provide zone comfort control
- The outdoor unit powers the indoor unit, and should a power outage occur, the system is automatically restarted when power returns
- INVERTER-driven compressor and LEV provide high efficiency and comfort while using only the energy needed to maintain maximum performance
- Multiple fan speed options: Quiet, Low, Medium, High, Super-high, Auto
- Multiple control options available:
  - Hand-held Remote Controller (provided with unit)
  - kumo cloud® smart device app for remote access
  - Third-party interface options
  - Wired or wireless controllers
- Quiet operation
- Smart Set: recalls a preferred preset temperature setting at the touch of a button
- Blue Fin anti-corrosion treatment applied to the outdoor unit heat exchanger for increased coil protection and longer life

## SPECIFICATIONS: MSZ-GL15NA & MUZ-GL15NA

|                               |  |         |                         |
|-------------------------------|--|---------|-------------------------|
| Cooling <sup>1</sup>          | Maximum Capacity   | BTU/H   | 18,200                  |
|                               | Rated Capacity   | BTU/H   | 14,000                  |
|                               | Minimum Capacity   | BTU/H   | 3,100                   |
|                               | Maximum Power Input  | W       | 2,000                   |
|                               | Rated Power Input  | W       | 1,080                   |
|                               | Moisture Removal   | Pints/h | 2.7                     |
|                               | Sensible Heat Factor   |         | 0.78                    |
|                               | Power Factor   | %       | 97 / 97                 |
| Heating at 47°F <sup>2</sup>  | Maximum Capacity   | BTU/H   | 20,900                  |
|                               | Rated Capacity   | BTU/H   | 18,000                  |
|                               | Minimum Capacity   | BTU/H   | 4,800                   |
|                               | Maximum Power Input  | W       | 2,010                   |
|                               | Rated Power Input  | W       | 1,600                   |
|                               | Power Factor   | %       | 98 / 98                 |
| Heating at 17°F <sup>3</sup>  | Maximum Capacity   | BTU/H   | 16,400                  |
|                               | Rated Capacity   | BTU/H   | 12,200                  |
|                               | Maximum Power Input  | W       | 1,850                   |
|                               | Rated Power Input  | W       | 1,190                   |
| Heating at 5°F <sup>4</sup>   | Maximum Capacity   | BTU/H   | 13,680                  |
|                               | Maximum Power Input  | W       | 1,570                   |
| Heating at -4°F <sup>5</sup>  | Maximum Capacity   | BTU/H   | 11,160                  |
| Heating at -13°F <sup>6</sup> | Maximum Capacity   | BTU/H   | -                       |
| Efficiency                    | SEER   |         | 21.6                    |
|                               | EER <sup>1</sup>   |         | 13.0                    |
|                               | HSPF (IV)  |         | 11.7                    |
|                               | COP at 47°F <sup>2</sup>   |         | 3.30                    |
|                               | COP at 17°F in Maximum Capacity <sup>3</sup>   |         | 2.60                    |
|                               | COP at 5°F in Maximum Capacity <sup>4</sup>  |         | 2.55                    |
|                               | ENERGY STAR® certified units (ENERGY STAR products are third-party certified by an EPA-recognized Certification Body.) |         | YES                     |
| Electrical                    | Voltage, Phase, Frequency  |         | 208/230V, 1 phase, 60Hz |
|                               | Guaranteed Voltage Range   | V AC    | 187 - 253               |
|                               | Voltage: Indoor - Outdoor, S1-S2   | V AC    | 208 / 230               |
|                               | Voltage: Indoor - Outdoor, S2-S3   | V DC    | 24                      |
|                               | Short-circuit Current Rating (SCCR)  | kA      | 5                       |
|                               | Recommended Fuse/Breaker Size (Outdoor)  | A       | 15                      |
|                               | Recommended Wire Size (Indoor - Outdoor)   | AWG     | 14                      |
| Indoor Unit                   | MCA  | A       | 1                       |
|                               | MOCP   | A       | 15                      |
|                               | Blower Motor Full Load Amperage  | A       | 0.76                    |
|                               | Blower Motor Output  | W       | 30                      |

## SPECIFICATIONS: MSZ-GL15NA & MUZ-GL15NA

|   |  |                      |                             |
|---|--|----------------------|-----------------------------|
|   | Airflow Rate at Cooling, Dry                 | CFM                  | 533-420-335-272-205         |
|   | Airflow Rate at Cooling, Wet                 | CFM                  | 498-385-300-237-170         |
|   | Airflow Rate at Heating, Dry                 | CFM                  | 463-367-304-247-205         |
|   | Sound Pressure Level (Cooling)               | dB(A)                | 49-44-38-32-26              |
|   | Sound Pressure Level (Heating)               | dB(A)                | 46-40-35-30-26              |
|   | Drain Pipe Size                              | In. (mm)             | 5/8 (15.88)                 |
|   | Heat Exchanger Type                          | Plate fin coil       |                             |
|   | External Finish Color                        | Munsell 1.0Y 9.2/0.2 |                             |
|   | Unit Dimensions                              | W: In. (mm)          | 31-7/16 (798)               |
|   |  | D: In. (mm)          | 9-1/8 (232)                 |
|   |  | H: In. (mm)          | 11-5/8 (295)                |
|   | Package Dimensions                           | W: In. (mm)          | 33-1/2 (850)                |
|   |  | D: In. (mm)          | 12 (300)                    |
|   |  | H: In. (mm)          | 14 (350)                    |
| Unit Weight                             | Lbs. (kg)                                    | 22 (10)              |                             |
| Package Weight                          | Lbs. (kg)                                    | 26 (11.5)            |                             |
| Indoor Unit Operating Temperature Range | Cooling Intake Air Temp (Maximum / Minimum)* | °F                   | 90 DB, 73 WB / 67 DB, 57 WB |
|   | Heating Intake Air Temp (Maximum / Minimum)  | °F                   | 80 DB / 70 DB               |
| Outdoor Unit                            | MCA  | A                    | 10                          |
|   | MOCP   | A                    | 15                          |
|   | Fan Motor Full Load Amperage                 | A                    | 0.5                         |
|   | Fan Motor Output                             | W                    | 55                          |
|   | Airflow Rate                                 | CFM                  | 1,243 / 1,229               |
|   | Refrigerant Control                          | LEV                  |                             |
|   | Defrost Method                               | Reverse cycle        |                             |
|   | Heat Exchanger Type                          | Plate fin coil       |                             |
|   | Sound Pressure Level, Cooling <sup>1</sup>   | dB(A)                | 49                          |
|   | Sound Pressure Level, Heating <sup>2</sup>   | dB(A)                | 51                          |
|   | Compressor Type                              | DC INVERTER-driven   |                             |
|   | Compressor Model                             | SNB130FQBMT          |                             |
|   | Compressor Rated Load Amps                   | A                    | 7.4                         |
|   | Compressor Locked Rotor Amps                 | A                    | 9.3                         |
|   | Compressor Oil Type // Charge                | oz.                  | FV50S // 11.8               |
|   | External Finish Color                        | Munsell 3Y 7.8/1/1   |                             |
|   | Base Pan Heater                              | Optional             |                             |
|   | Unit Dimensions                              | W: In. (mm)          | 31-1/4 (800)                |
|   |  | D: In. (mm)          | 11-1/6 (285)                |
|   |  | H: In. (mm)          | 21-5/10 (550)               |
| Package Dimensions                      | W: In. (mm)                                  | 37 (940)             |                             |
|   | D: In. (mm)                                  | 14-15/16 (380)       |                             |
|   | H: In. (mm)                                  | 24-13/16 (630)       |                             |

## SPECIFICATIONS: MSZ-GL15NA & MUZ-GL15NA

|  |  |           |            |
|--|--|-----------|------------|
|  | Unit Weight  | Lbs. (kg) | 81 (37)    |
|  | Package Weight                                     | Lbs. (kg) | 90 (40)    |
| Outdoor Unit Operating Temperature Range | Cooling Air Temp (Maximum / Minimum)*              | °F        | 115 / 14   |
|  | Cooling Thermal Lock-out / Re-start Temperatures** | °F        | -1 / 3     |
|  | Heating Air Temp (Maximum / Minimum)               | °F        | 75 / -4    |
|  | Heating Thermal Lock-out / Re-start Temperatures** | °F        | -9 / -4    |
| Refrigerant                              | Type   |           | R410A      |
|  | Charge   | Lbs, oz   | 2, 9       |
| Piping                                   | Gas Pipe Size O.D. (Flared)                        | In. (mm)  | 1/2 (12.7) |
|  | Liquid Pipe Size O.D. (Flared)                     | In. (mm)  | 1/4 (6.35) |
|  | Maximum Piping Length                              | Ft. (m)   | 65 (20)    |
|  | Maximum Height Difference                          | Ft. (m)   | 40 (12)    |
|  | Maximum Number of Bends                            |           | 10         |

### Notes

|   |  |    |                              |
|---|--|----|------------------------------|
| AHRI Rated Conditions<br>(Rated data is determined at a fixed compressor speed) | <sup>1</sup> Cooling (Indoor // Outdoor)         | °F | 80 DB, 67 WB // 95 DB, 75 WB |
|   | <sup>2</sup> Heating at 47°F (Indoor // Outdoor) | °F | 70 DB, 60 WB // 47 DB, 43 WB |
|   | <sup>3</sup> Heating at 17°F (Indoor // Outdoor) | °F | 70 DB, 60 WB // 17 DB, 15 WB |
| Conditions  | <sup>4</sup> Heating at 5°F (Indoor // Outdoor)  | °F | 70 DB, 60 WB // 5 DB, 4 WB   |
|   | <sup>5</sup> Heating at -4°F (Indoor // Outdoor) | °F | 70 DB, 60 WB // -4 DB, -5 WB |

\*Applications should be restricted to comfort cooling only; equipment cooling applications are not recommended for low ambient temperature conditions.  
 \*\*System cuts out in heating mode to avoid thermistor error and automatically restarts at these temperatures.

## ACCESSORIES: MSZ-GL15NA

|  |                         |
|--|-------------------------|
| Anti-allergy Enzyme Filter   | □ MAC-408FT-E           |
| kumo touch™ RedLINK™ Wireless Controller   | □ MHK2                  |
| Deluxe MA Remote Controller <sup>1</sup>   | □ PAR-40MAAU            |
| Simple MA Controller <sup>1</sup>  | □ PAC-YT53CRAU-J        |
| Touch MA Controller <sup>1</sup>   | □ PAR-CT01MAU-SB        |
| Wired Remote Sensor  | □ M21-EAA-307           |
| Wireless Temperature and Humidity Sensor   | □ PAC-USWHS003-TH-1     |
| System Control Interface <sup>2</sup>  | □ MAC-334IF-E           |
| Wireless Interface 2   | □ PAC-USWHS002-WF-2     |
| Thermostat Interface   | □ PAC-US444CN-1         |
| kumo station®  | □ PAC-WHS01HC-E         |
| USNAP Interface  | □ PAC-WHS01UP-E         |
| IT Extender  | □ PAC-WHS01IE-E         |
| BACnet® and MODBUS® Interface  | □ PAC-UKPRC001-CN-1     |
| Lockdown Bracket for Hand-held Remote Controllers  | □ RCMKP1CB              |
| Blue Diamond Sensor Extension Cable — 15 Ft.   | □ C13-103               |
| Blue Diamond Alarm Extension Cable — 6.5 Ft.   | □ C13-192               |
| Blue Diamond MultiTank — collection tank for use with multiple pumps   | □ C21-014               |
| Blue Diamond Rubber Foot Pads  | □ F10-010               |
| Mini Condensate Pump — 230 volt application  | □ SI30-230              |
| MegaBlue Advanced Blue Diamond Condensate Pump w/ Reservoir & Sensor   | □ X87-835 - 110 to 250V |
| MaxiBlue Advanced Blue Diamond Mini Condensate Pump w/ Reservoir & Sensor (110V) up to 48,000 BTU/H[recommended] | □ X87-711 - 110V        |
| Advanced Blue Diamond Mini Condensate Pump w/ Reservoir & Sensor (208/230V) [recommended]                        | □ X87-721 - 208/230V    |
| MicroBlue Blue Diamond Mini Condensate Pump (110/208/230V) up to 18,000 BTU/H                                    | □ X85-003               |
| Fascia Kit for MicroBlue Pump – mounts the MicroBlue and sensor directly beneath the indoor unit                 | □ T18-016               |
| Drain Pan Level Sensor   | □ SS610E                |
| (30A/600V/UL) [fits 2" X 4" utility box] - Black   | □ TAZ-MS303             |
| (30A/600V/UL) [fits 2" X 4" utility box] - White   | □ TAZ-MS303W            |

<sup>1</sup> Requires MAC-334IF-E


<sup>2</sup> Allows indoor units to connect to an MA Controller

## ACCESSORIES: MUZ-GL15NA

|   |   |
|---|---|
| Air Outlet Guide  | <input type="checkbox"/> MAC-881SG      |
| Drain Socket  | <input type="checkbox"/> MAC-860DS      |
| Optional Defrost Heater                                       | <input type="checkbox"/> MAC-640BH-U    |
| Hail Guard  | <input type="checkbox"/> HG-B4          |
| Outdoor Unit 3-1/4 inch Mounting Base (Pair) - Plastic        | <input type="checkbox"/> DSD-400P       |
| Condensing Unit Mounting Pad 16" x 36" x 3"                   | <input type="checkbox"/> ULTRILITE1     |
| Outdoor Unit Stand — 12" High                                 | <input type="checkbox"/> QSMS1201M      |
| Outdoor Unit Stand — 18" High                                 | <input type="checkbox"/> QSMS1801M      |
| Outdoor Unit Stand — 24" High                                 | <input type="checkbox"/> QSMS2401M      |
| Heavy Duty Wall Mounting Bracket— Coated Steel                | <input type="checkbox"/> QSWB2000M-1    |
| Heavy Duty Wall Mounting Bracket — 316 Series Stainless Steel | <input type="checkbox"/> QSWBSS         |
| 15' x 1/4" x 15' / 1/2" Lineset (Twin-Tube Insulation)        | <input type="checkbox"/> MLS141212T-15  |
| 30' x 1/4" x 30' / 1/2" Lineset (Twin-Tube Insulation)        | <input type="checkbox"/> MLS141212T-30  |
| 50' x 1/4" x 50' / 1/2" Lineset (Twin-Tube Insulation)        | <input type="checkbox"/> MLS141212T-50  |
| 65' x 1/4" x 65' / 1/2" Lineset (Twin-Tube Insulation)        | <input type="checkbox"/> MLS141212T-65  |
| 100' x 1/4" x 100' / 1/2" Lineset (Twin-Tube Insulation)      | <input type="checkbox"/> MLS141212T-100 |

# DIMENSIONS: MSZ-GL15NA

**Unit: inch**

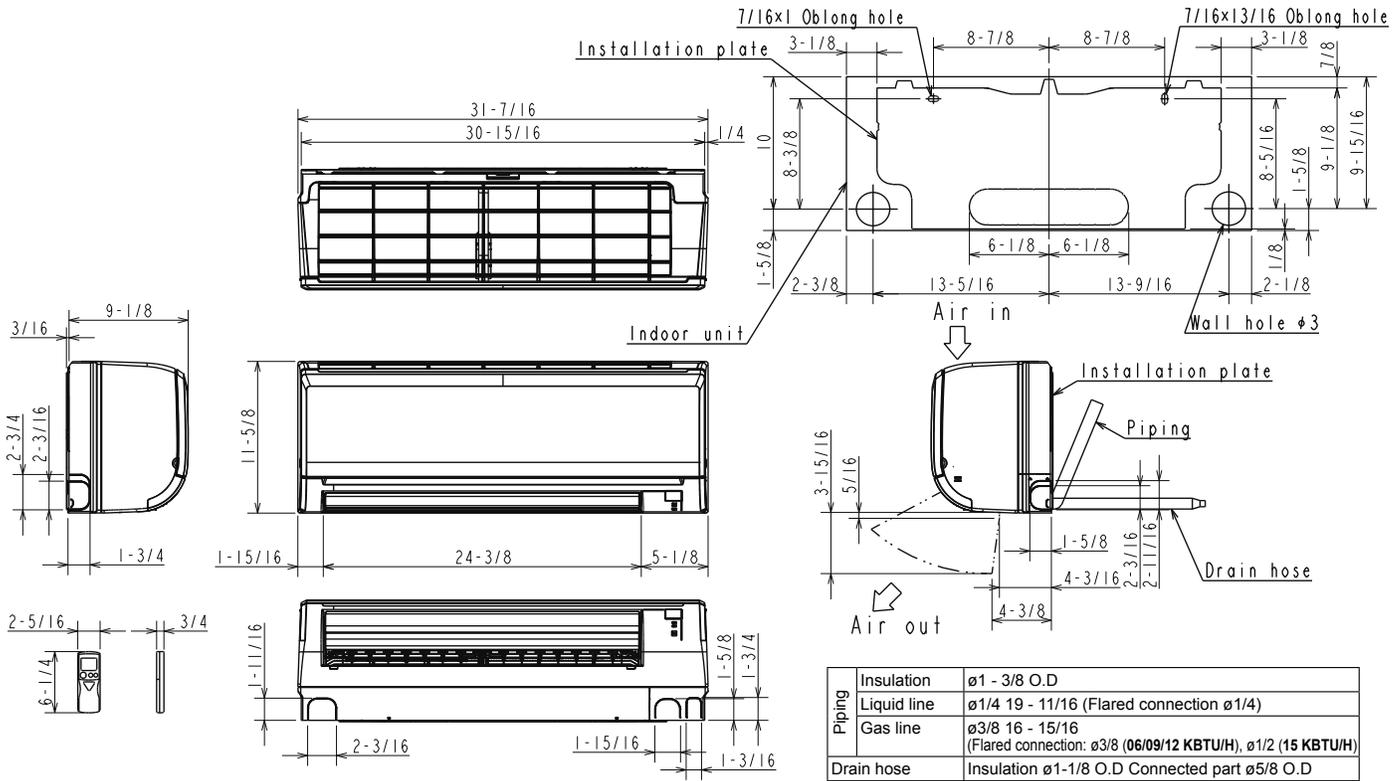


# DIMENSIONS: MUZ-GL15NA




Unit: inch

## REQUIRED SPACE

\*1 4 in. or more when front and sides of the unit are clear

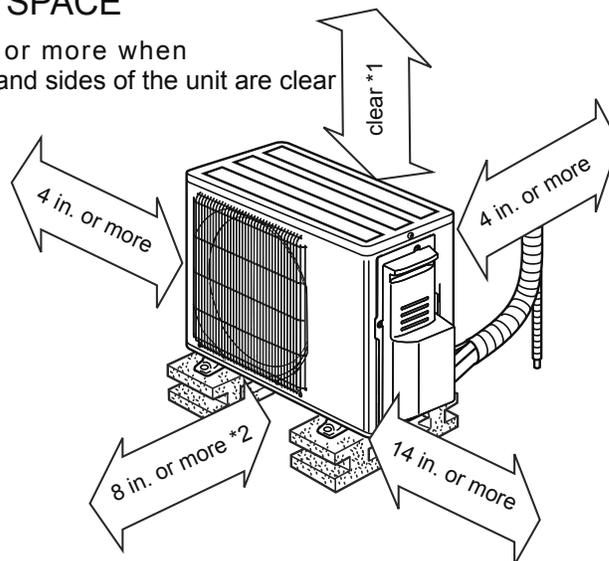

\*2 When any 2 sides of left, right and rear of the unit are clear

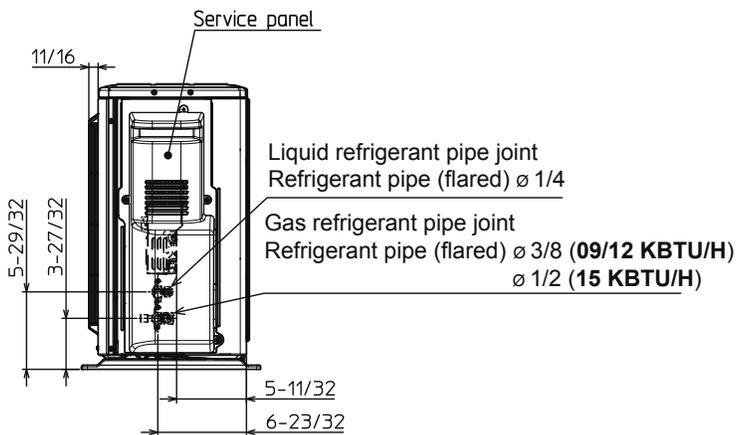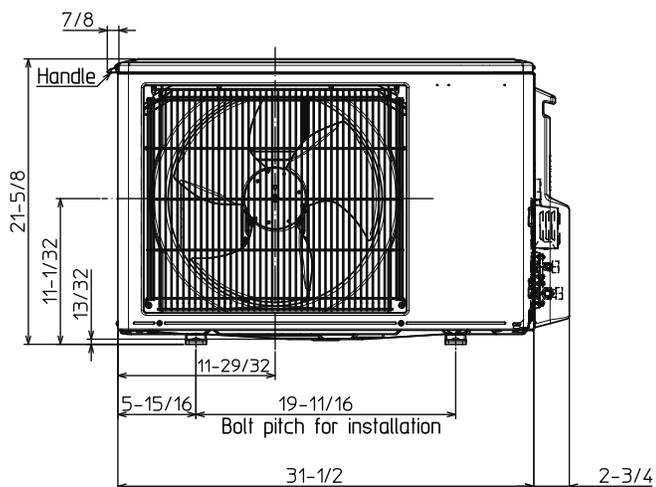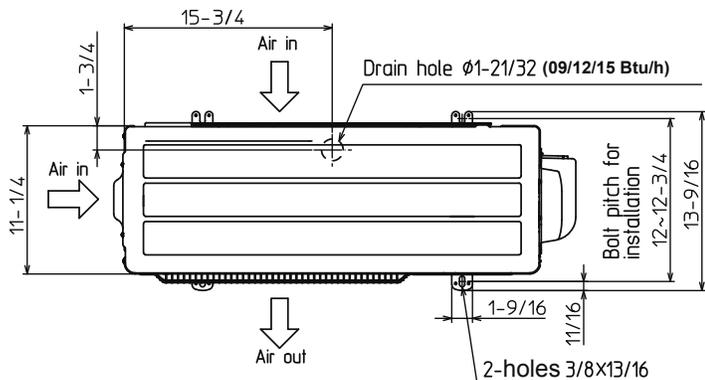

1340 Satellite Boulevard, Suwanee, GA 30024  
Toll Free: 800-433-4822 [www.mehvac.com](http://www.mehvac.com)

FORM# MSZ-GL15NA / MUZ-GL15NA - 202003



Specifications are subject to change without notice.

© 2020 Mitsubishi Electric Trane HVAC US LLC. All rights reserved.